


250.1170 | Floor Mounted Tub Filler With Hand Held Shower

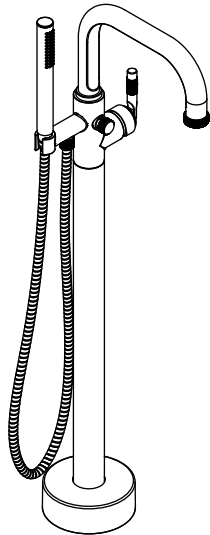

**SPECIFICATIONS:**

- Solid Brass construction
- Floor Mount Installation
- Hand shower flow rate = 1.8 GPM @ 60 PSI w/ back flow prevention
- Diverter knob controls water flow between spout and hand held
- 9.0 GPM spout flow rate.
- Single Lever allows both volume and temperature control

**STANDARDS:**

- ASME A112.18.1 / CSA B125.1

